

ONEFLOR USA ACOUSTICAL PERFORMANCE TEST REPORT

SCOPE OF WORK

ASTM E90 AND ASTM E492 TESTING ON
3.5 MM ONEFLOR USA SETAGRIP/SETADB/CLING/CLING COMFORT LVT FLOORING

SPECIMEN TYPE

Concrete Slab - 203 mm

REPORT NUMBER

P6745.02-113-11-R0

TEST DATE

01/23/23

ISSUE DATE

01/24/23

RECORD RETENTION END


01/23/27

PAGES

15

DOCUMENT CONTROL

RTTDS-R-AMER-Test-2844 (03/23/22) © 2017 INTERTEK

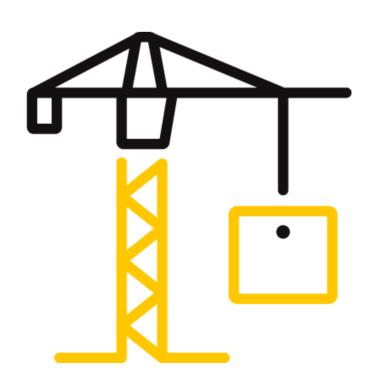



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR ONEFLOR USA

Report No.: P6745.02-113-11-R0

Date: 01/24/23

REPORT ISSUED TO

ONEFLOR USA

12510 West Airport Boulevard Sugar Land, Texas 77478

SECTION 1

SCOPE

Architectural Testing, Inc. (an Intertek company) dba Intertek Building & Construction (B&C) was contracted by OneFlor USA to perform testing in accordance with ASTM E90 AND ASTM E492 on 3.5 mm OneFlor USA Setagrip/SetaDB/Cling/Cling Comfort LVT Flooring. Results obtained are tested values and were secured by using the designated test methods. Testing was conducted in the VT test chambers at Intertek B&C located in York, Pennsylvania.

This report does not constitute certification of this product nor an opinion or endorsement by this laboratory.

SECTION 2

SUMMARY OF TEST RESULTS

DATA FILE NO.	P6745.02
SERIES/MODEL:	3.5 mm OneFlor USA Setagrip/SetaDB/Cling/Cling Comfort LVT Flooring
STC	54
IIC	60
HIIC	64

COMPLETED BY:	Corey S. Kohler	REVIEWED BY:	Daniel B. Mohler
	Technician - Acoustical		Project Manager - Acoustical
TITLE:	Testing	TITLE:	Testing
SIGNATURE:		SIGNATURE:	
DATE:	01/24/23	DATE:	01/24/23

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of ACCREDITED the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample(s) tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Version: 03/23/22 RTTDS-R-AMER-Test-2844 Page 2 of 15



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR ONEFLOR USA

Report No.: P6745.02-113-11-R0

Date: 01/24/23

SECTION 3

TEST METHODS

The specimen was evaluated in accordance with the following:

ASTM E90-09 (2016), Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions

ASTM E413-22, Classification for Rating Sound Insulation

ASTM E492-22, Standard Test Method for Laboratory Measurement of Impact Sound Transmission Through Floor-Ceiling Assemblies Using the Tapping Machine

ASTM E989-21, Classification for Determination of Impact Insulation Class (IIC)

ASTM E2235-04 (2020), Standard Test Method for Determination of Decay Rates for Use in Sound Insulation Test Methods

ASTM E3207-21, Standard Classification for Determination of Low-Frequency Impact Sound Ratings

ASTM E3222-20, Standard Classification for Determination of High-Frequency Impact Sound Ratings

SECTION 4

MATERIAL SOURCE/INSTALLATION

The full test specimen was assembled on the day of testing by B&C. All materials provided by the client were installed on an existing B&C assembly (Concrete Slab - 203 mm) utilizing B&C-supplied materials. The assembly was installed in a steel test frame which was installed into the opening between the source and receive rooms in the test chamber. The test frame was isolated from the structure with dense neoprene gasket.

The total weight of the floor/ceiling assembly was 5808.1 kg. B&C will store samples of the test specimen for four years. Photographs of the test specimen are included in the report. A drawing of the test specimen is included in the report.

B&C will service this report for the entire test record retention period. Test records, such as detailed drawings, datasheets, representative samples of test specimens, or other pertinent project documentation, will be retained by B&C for the entire test record retention period.

Unless differently required, Intertek reports apply the "Simple Acceptance" rule, also called "Shared Risk approach," of ILAC-G8:09/2019, Guidelines on Decision Rules and Statements of Conformity.



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR ONEFLOR USA

Report No.: P6745.02-113-11-R0

Date: 01/24/23

SECTION 5

EQUIPMENT

INSTRUMENT	MANUFACTURER	MODEL	DESCRIPTION	ASSET #	CAL DAT	ΓE
2-Channel Analog Input	National Instruments	NI 9250	2-Channel Analog Input	INT02586	04/22	*
2-Channel Analog Input	National Instruments	NI 9250	2-Channel Analog Input	INT02587	04/22	*
2-Channel Analog Input	National Instruments	NI 9250	2-Channel Analog Input	INT02608	04/22	*
2-Channel Analog Input	National Instruments	NI 9250	2-Channel Analog Input	INT02609	04/22	*
2-Channel Analog Input	National Instruments	NI 9250	2-Channel Analog Input	INT02610	04/22	*
2-Channel Analog Input	National Instruments	NI 9250	2-Channel Analog Input	INT02612	04/22	*
2-Channel Analog Output	National Instruments	NI 9260	2-Channel Analog Output	INT02573	04/22	*
Microphone Calibrator	Norsonic	34093	Acoustical Calibrator	65105	10/22	
Receive Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	63741	06/22	
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	63740	04/22	
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	65969	06/22	
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	63747	01/23	
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	65968	01/22	
Receive Room Environmental Indicator	Comet	T7510	Temperature and Humidity Transmitter	63812 63811	10/22 10/22	
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	65103	02/22	
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	65617	08/22	
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	63739	04/22	
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	63742	04/22	
Source Room Microphone	PCB Electronics	378C20	Microphone and Preamplifier	64906	04/22	
Source Room Environmental Indicator	Comet	T7510	Temperature and Humidity Transmitter	63810	10/22	
Tapping Machine	Norsonic	Nor277 Tapping Machine INT0093		INT00936	02/22	

^{*} The calibration frequency for this equipment is every two years per the manufacturer's recommendation.

VT RECEIVE ROOM VOLUME	158.34 m³
VT SOURCE ROOM VOLUME	190 m ³

SECTION 6

LIST OF OFFICIAL OBSERVERS

NAME	COMPANY
Corey S. Kohler	Intertek B&C
Daniel B. Mohler	Intertek B&C

Version: 03/23/22 Page 4 of 15 RTTDS-R-AMER-Test-2844



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR ONEFLOR USA

Report No.: P6745.02-113-11-R0

Date: 01/24/23

SECTION 7

TEST PROCEDURE

The microphones were calibrated before conducting the tests. The air temperature and relative humidity conditions were monitored and recorded during all measurements. The average temperature and humidity of both the source and receive rooms are listed in Sections 10 and 11. The maximum and minimum temperatures and humidities of the receive room from the duration of the test are listed in Sections 12 and 13.

The airborne transmission loss test was conducted in accordance with the ASTM E90 test method using the single direction method. Two background noise sound pressure level and five sound absorption measurements were conducted at each of five microphone positions. Two sound pressure level measurements were made simultaneously in both rooms, at each of five microphone positions.

The impact sound transmission test was conducted in accordance with the ASTM E492 test method. Two background noise sound pressure level, two sound pressure level measurements with the tapping machine operating at each position specified by ASTM E492, and five sound absorption measurements were conducted at each of five microphone positions.

Detailed test procedures, data for flanking limit tests, repeatability measurements, and reference specimen tests are available upon request.

SECTION 8

TEST CALCULATIONS

The STC (Sound Transmission Class), IIC (Impact Insulation Class), and HIIC (High-Frequency Impact Insulation Class) ratings were calculated in accordance with ASTM E413, ASTM E989, and ASTM E3222, respectively.



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR ONEFLOR USA

Report No.: P6745.02-113-11-R0

Date: 01/24/23

SECTION 9

TEST SPECIMEN DESCRIPTION

MATERIAL	DIMENSIONS (mm)		MANUFACTURER AND SERIES	QUANTITY	AVERAGE WEIGHT		
LVT Flooring	1219.2 by 152.4	3.5	OneFlor Setagrip/SetaDB/ Cling/Cling Comfort	10.98 m²	4.25 kg/m²		
	Note: The floor topping was bonded to the gypsum concrete with the Setagrip bonding system.						
	3023 by 3632	203.2	5000 PSI	10.98 m²	524.71 kg/m²		
Concrete Slab	Note: Installed in a test frame flush to the source room. Mats of #5 reinforcing bars were placed 25.4 mm from both the top and bottom of the slab, with bars spaced on 305 mm centers in both directions. No noticeable shrinkage or cracking was visible on the specimen.						



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building


TEST REPORT FOR ONEFLOR USA

Report No.: P6745.02-113-11-R0

Date: 01/24/23

SECTION 10

TEST RESULTS - AIRBORNE SOUND TRANSMISSION LOSS

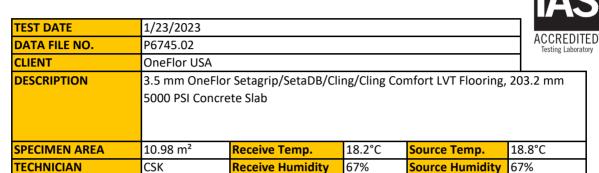

FREQ	BACKGROUND	ABSORPTION	SOURCE	RECEIVE	SPECIMEN	95%	NUMBER
FREQ	SPL	ABSURPTION	SPL	SPL	TL	SAMPLING	OF
(Hz)	(dB)	m²	(dB)	(dB)	(dB)	LIMIT	DEFICIENCIES
50	38.8	31.1	109	71	35	2.9	-
63	35.2	17.5	107	66	40	5.2	-
80	29.5	14.4	102	67	35	3.6	-
100	24.2	9.6	100	67	35	1.9	-
125	26.9	9.0	103	64	41	2.3	0
160	25.8	8.9	101	62	42	1.0	0
200	20.7	9.7	98	53	47	2.0	0
250	17.8	11.7	100	52	49	1.0	0
315	20.5	10.3	104	55	50	1.1	0
400	18.8	8.8	104	53	53	0.7	0
500	18.3	8.3	100	49	52	0.9	2
630	21.0	8.2	98	46	53	0.6	2
800	21.4	8.5	99	49	52	0.7	4
1000	23.3	8.8	100	48	52	0.4	5
1250	19.7	9.0	100	45	56	0.7	2
1600	16.7	9.1	100	41	60	0.4	0
2000	13.7	9.5	100	40	60	0.4	0
2500	10.9	10.7	95	38	57	0.4	1
3150	9.0	11.5	93	39	54	0.6	4
4000	8.7	12.3	93	37	55	0.5	3
5000	8.9	14.1	91	30	60	0.6	-
6300	9.5	17.0	88	22	64	0.7	-
8000	10.1	21.2	91	18	69	1.1	-
10000	10.7	21.2	89	15	71	1.6	-
STC Ratin	<mark>g</mark> 54	(Sound Transmi	ssion Class)		Sum o	f Deficiencies	23

Notes:

- 1) Receive Room levels less than 5 dB above the Background levels are highlighted in yellow.
- 2) Specimen TL levels listed in $\ensuremath{\textit{red}}$ are potentially limited by the laboratory flanking limit.
- 3) Specimen TL levels listed in <u>blue</u> indicate the lower limit of the transmission loss.
- 4) Specimen TL levels listed in $\ green \ indicate$ that there has been a filler wall correction applied



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building


TEST REPORT FOR ONEFLOR USA


Report No.: P6745.02-113-11-R0

Date: 01/24/23

SECTION 11

TEST RESULTS - AIRBORNE SOUND TRANSMISSION LOSS GRAPH

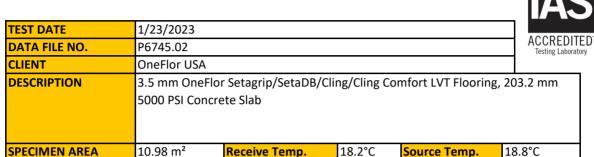

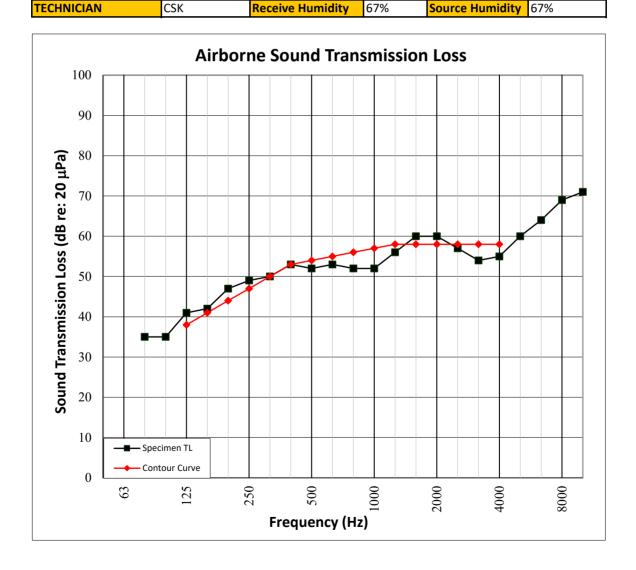



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building


TEST REPORT FOR ONEFLOR USA

Report No.: P6745.02-113-11-R0

Date: 01/24/23

SECTION 12

TEST RESULTS - IMPACT SOUND TRANSMISSION

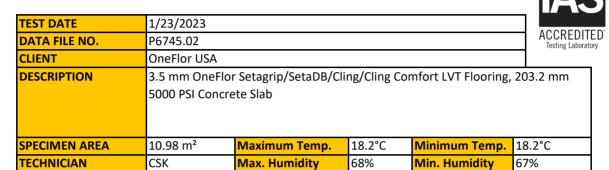

FREQ	BACKGROUND SPL	ABSORPTION	NORMALIZED IMPACT SPL	95% SAMPLING	NUMBER OF
(Hz)	(dB)	m²	(dB)	LIMIT	DEFICIENCIES
80	30.7	14.6	51	2.6	-
100	25.1	8.3	51	1.8	0
125	25.0	9.1	52	1.0	0
160	23.3	9.2	58	0.9	6
200	20.0	10.6	59	0.8	7
250	18.6	11.1	60	1.2	8
315	24.4	10.7	57	0.7	5
400	18.3	9.1	54	0.6	3
500	16.8	8.5	52	0.5	2
630	20.7	8.2	48	0.5	0
800	21.3	8.6	44	0.7	0
1000	22.5	8.8	40	0.8	0
1250	19.1	9.1	37	0.5	0
1600	15.9	9.0	35	0.6	0
2000	13.3	9.4	25	0.8	0
2500	10.8	10.5	19	0.8	0
3150	9.0	11.4	14	0.6	0
4000	8.6	12.4	10	0.3	-
5000	8.9	14.3	9	0.3	-
6300	9.5	17.1	10	0.3	-
8000	10.1	21.0	12	0.4	-
10000	10.6	21.0	12	0.4	-
IIC Ratio	ng 60	(Impact Insula	tion Class)	Sum of Deficienci	es 31

Notes: Receive Room levels less than 5 dB above the Background levels are highlighted in yellow.



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building


TEST REPORT FOR ONEFLOR USA


Report No.: P6745.02-113-11-R0

Date: 01/24/23

SECTION 13

TEST RESULTS - IMPACT SOUND TRANSMISSION GRAPH

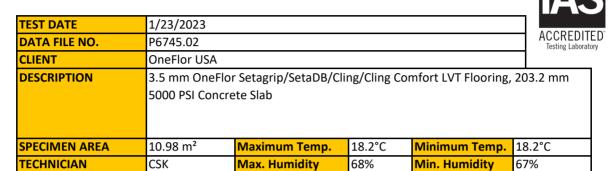

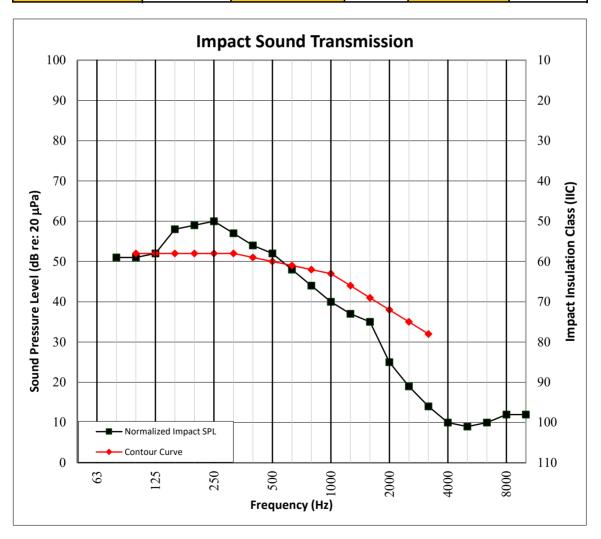



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building


TEST REPORT FOR ONEFLOR USA

Report No.: P6745.02-113-11-R0

Date: 01/24/23

SECTION 14

TEST RESULTS - HIGH-FREQUENCY IMPACT SOUND TRANSMISSION

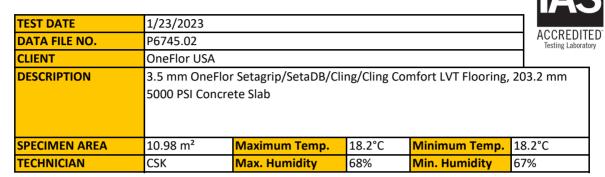

FREQ	BACKGROUND SPL	ABSORPTION	NORMALIZED IMPACT SPL	95% SAMPLE CONFIDENCE	NUMBER OF
(Hz)	(dB)	m²	(dB)	LIMIT	DEFICIENCIES
400	18.3	9.1	54	0.6	7.3
500	16.8	8.5	52	0.5	6.4
630	20.7	8.2	48	0.5	3.0
800	21.3	8.6	44	0.7	0.0
1000	22.5	8.8	40	0.8	0.0
1250	19.1	9.1	37	0.5	0.0
1600	15.9	9.0	35	0.6	0.0
2000	13.3	9.4	25	0.8	0.0
2500	10.8	10.5	19	0.8	0.0
3150	9.0	11.4	14	0.6	0.0
HIIC Ra	ting 64	(High-Frequen	cy Impact Insulation Class)	Sum of Deficienci	es 16.8

Notes: Receive Room levels less than 5 dB above the Background levels are highlighted in yellow.



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building


TEST REPORT FOR ONEFLOR USA


Report No.: P6745.02-113-11-R0

Date: 01/24/23

SECTION 15

TEST RESULTS - HIGH-FREQUENCY IMPACT SOUND TRANSMISSION GRAPH

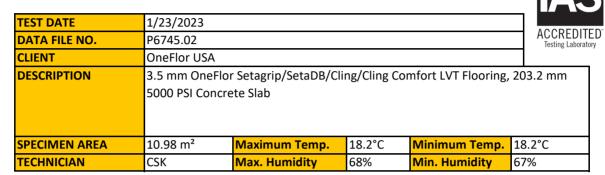

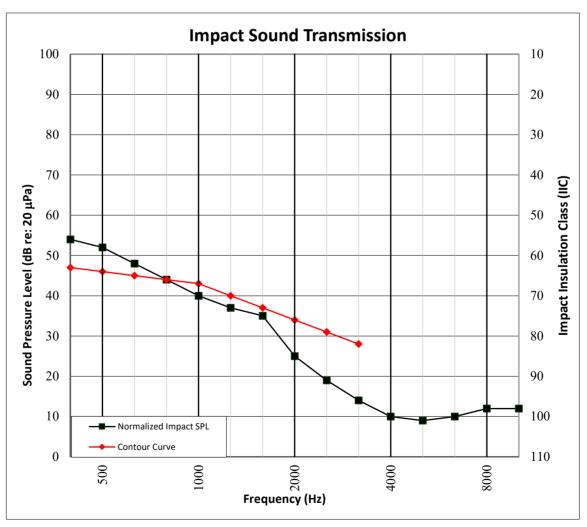



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR ONEFLOR USA

Report No.: P6745.02-113-11-R0

Date: 01/24/23

SECTION 16

PHOTOGRAPHS



Photo No. 1 Source Room View of Test Specimen Installation



Photo No. 2 Receive Room View of Test Specimen Installation



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building


TEST REPORT FOR ONEFLOR USA

Report No.: P6745.02-113-11-R0

Date: 01/24/23

SECTION 17

DRAWING



1-Floor Topping 2-Concrete Slab



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR ONEFLOR USA

Report No.: P6745.02-113-11-R0

Date: 01/24/23

SECTION 18

REVISION LOG

REVISION #	DATE	PAGES	DESCRIPTION
RO	01/24/23	N/A	Original Report Issue